


ПЛАН РАСПОЛОЖЕНИЯ

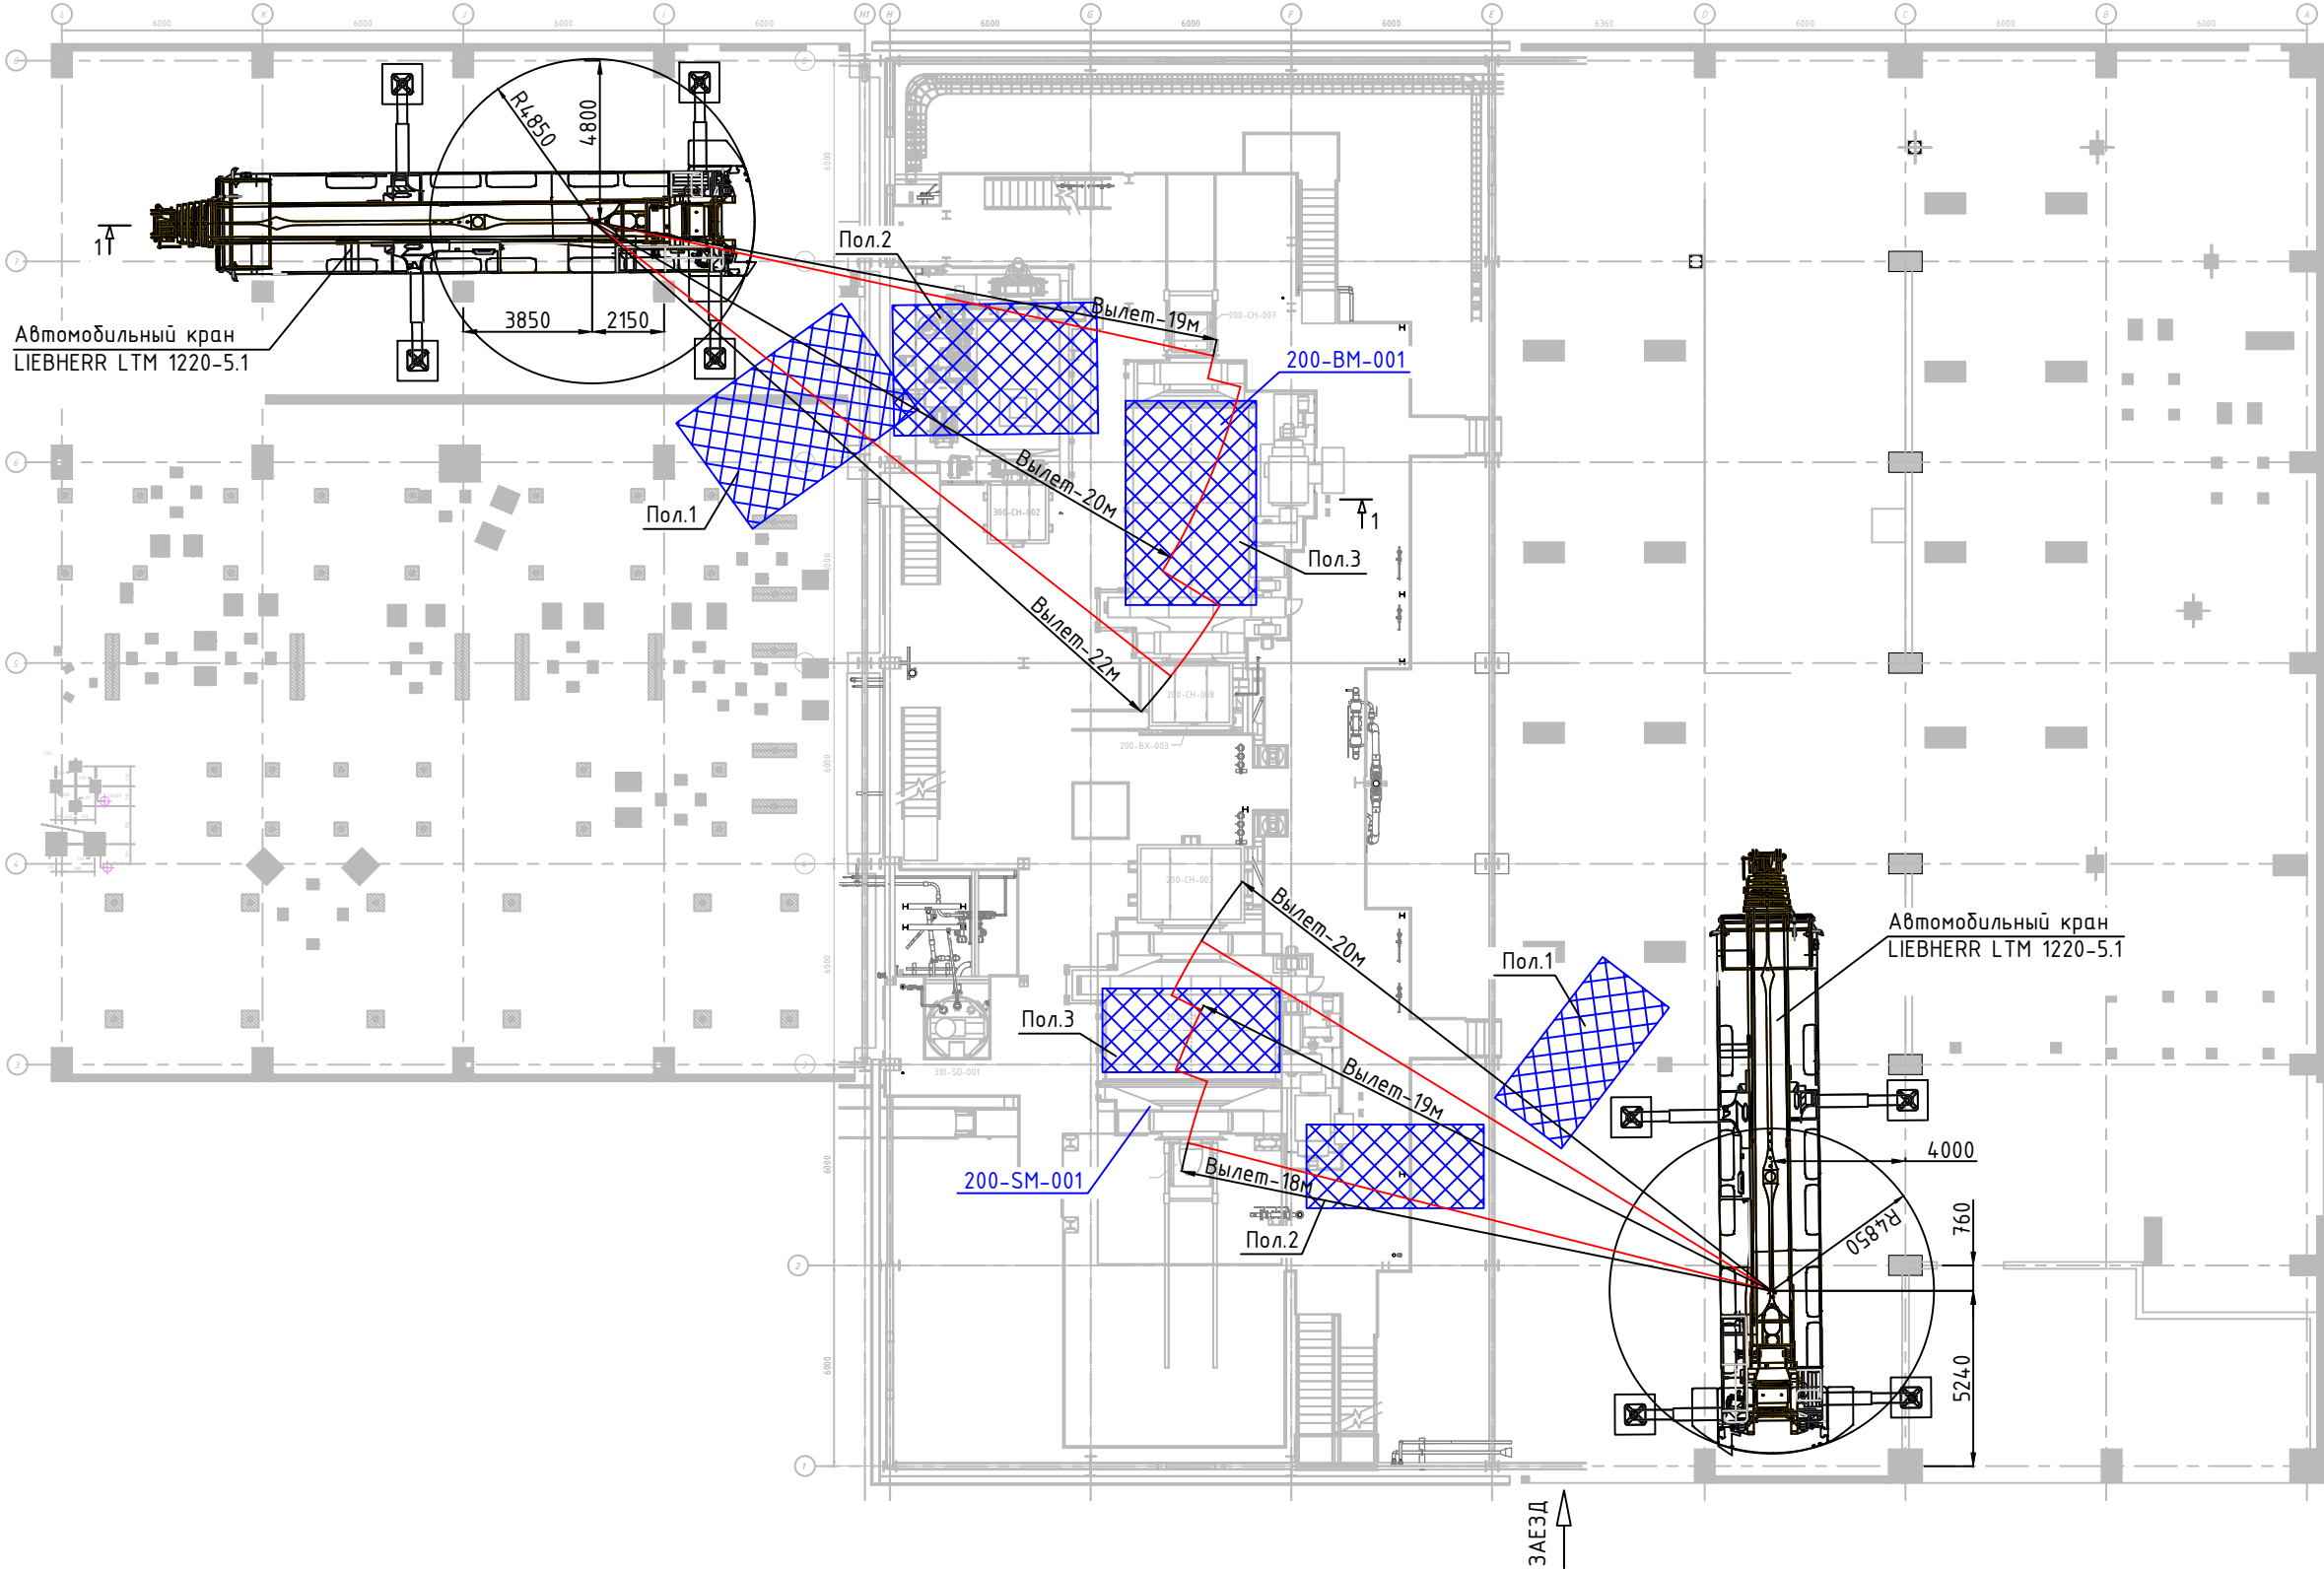

Г/П характеристики автомобильного крана  
LIEBHERR LTM 1220-5.2 (з/п-220тн.)

	13,3м.	17,6м.	21,9м.	26,2м.	30,5м.
3,0	152,0	135,0	135,0		
4,0	130,0	130,0	130,0	126,0	
5,0	114,0	114,0	112,0	109,0	102,0
6,0	100,0	101,0	100,0	97,0	95,0
7,0	90,0	90,0	89,0	87,0	85,0
8,0	81,0	81,0	81,0	79,0	77,0
9,0	73,0	73,0	73,0	72,0	71,0
10,0	63,0	66,0	67,0	66,0	65,0
11,0	45,5	61,0	61,0	60,0	61,0
12,0		55,0	55,0	55,0	56,0
14,0		45,0	46,0	47,0	46,5
16,0			39,5	39,5	39,0
18,0			33,5	33,5	33,5
20,0				29,2	28,2
22,0				25,6	25,2

Характеристики максимально тяжелого оборудования

п/п	Наименование	Размеры(мм)	Вес(т)
1	200-ВМ-001 (барабан)	6100х3900h	17,467т
2	200-СМ-001 (барабан)	2500х5300h	14,096т
3	Крышка		~16,0т

Примечание:  
Монтаж тяжелых элементов мельниц (барабана, крышки) выполняется автомобильным краном LIEBHERR LTM 1220-5.1 с одной стоянки.

Изм	Лист	№докум.	Подп.	Дата	RMG	Стадия	Масса	Масштаб	
Разраб.		ИП Шурупов		10.24		Р			
						Лист 1	Листов 2		
					План монтажа мельниц 200-ВМ-001 и 200-СМ-001	ИП Шурупов			