

A

NJ-SLE-XV-AA-S37f-ZAZ

B

C



D

E


F

G


H

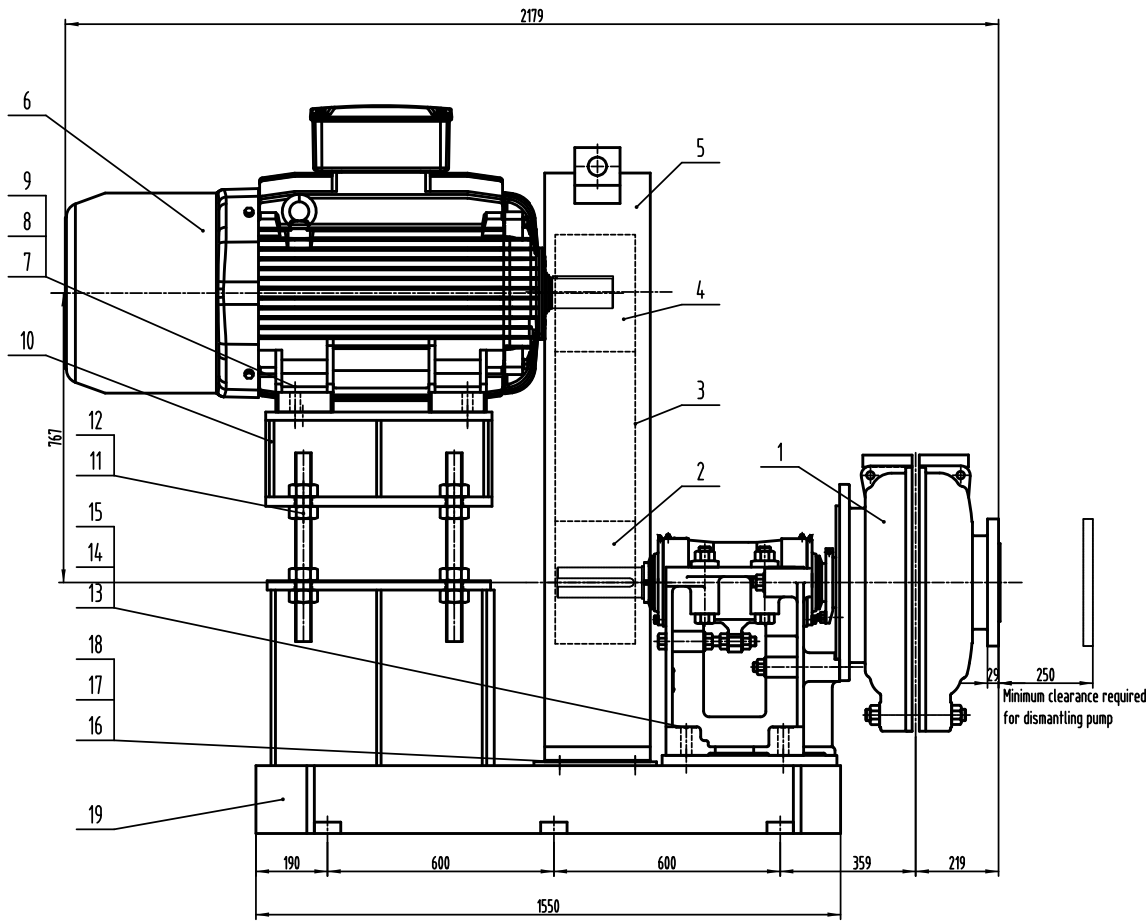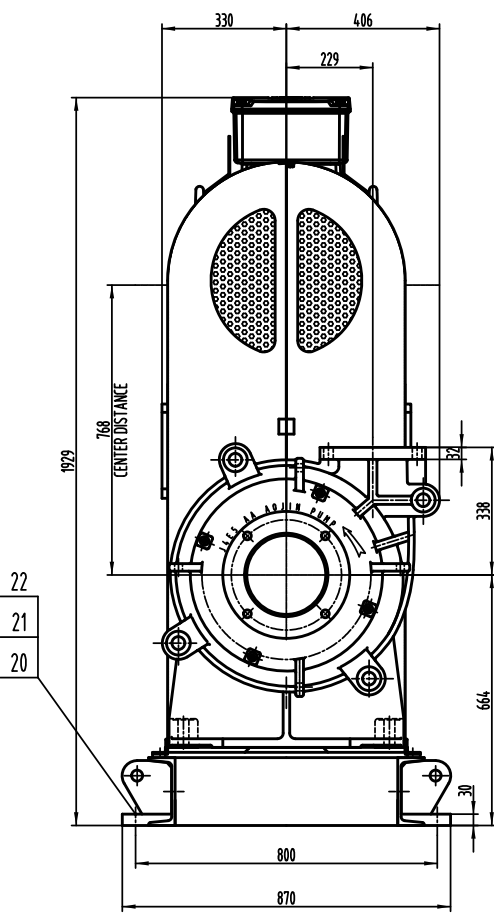

Parameter Table	
Flow(m³/h)	310
Head(m)	40
Speed(rpm)	1399
Sealing Type	GLAND SEAL
Sealing water flow(L/S)	0.7
Sealing water pressure(Mpa)	0.69



DISCHARGE FLANGE



INTAKE FLANGE

NOTE

- 1.The motor sheave and the pump sheave must be parallel.
- 2.When the discharge has longer pipe, it is not allowed to press all pipe's weight on the pump.Additional fixed support should be added.

22	GB/T95	Washer 24	6	200HV D.Zn			13	GB/T898	Stud M24×120	4	8.8 D.Zn					
21	GB/T6170	Nut M24	6	8 D.Zn			12	GB/T6170	Nut M42	16	8 D.Zn					
20	GB/T799	Expansion Bolt M24×600	6	3.6			11	GB/T15389	Screw M24×500	4	4.8 D.Zn					
19	ZVZ-E-Y315-01	Base	1	Q235A			10	ZVZ-E-Y315-02	Motor Support	1	Q235A					
18	GB/T95	Washer 8	4	200HV D.Zn			9	GB/T93	Washer 24	4	65Mn					
17	GB/T93	Washer 8	4	65Mn			8	GB/T6170	Nut M24	4	8 D.Zn					
16	GB/T5783	Bolt M8×20	4	8.8 D.Zn			7	GB/T5782	Bolt M24×120	4	8.8 D.Zn					
15	GB/T93	Washer 24	4	65Mn			6	315S/M-4	Motor 110KW/380V/50HZ/VFD	1						
14	GB/T6170	Nut M24	4	8 D.Zn			5	ZVZ-E-Y315-03	Protective Cover	1	Q235A					
Item	Code Name	Description	Q'ty	Material	Single Weight	Total Weight	Note	Item	Code Name	Description	Q'ty	Material	Single Weight	Total Weight	Note	

4	SPC300-06(3535)	Taper Pulley Ø80	1	HT200			For Motor
3	XPC2650	V-Belt	6				
2	SPC315-06(3535)	Taper Pulley Ø80	1	HT200			For Pump
1	J4E5-AA-AX	Slurry Pump	1				
Item	Code Name	Description	Q'ty	Material	Single Weight	Total Weight	Note
				J4E5-AA-AX Slurry Pump		ZVZ-J4E5-AA-AX-315-EN	
				ZVZ Drive			
				AOJIN Hebei Aojin Machinery Co.,Ltd			
				Drawing Mark		Weight	
				S A		2300Kg	
				Title Sheet		The Sheet	
				Date		Date	